



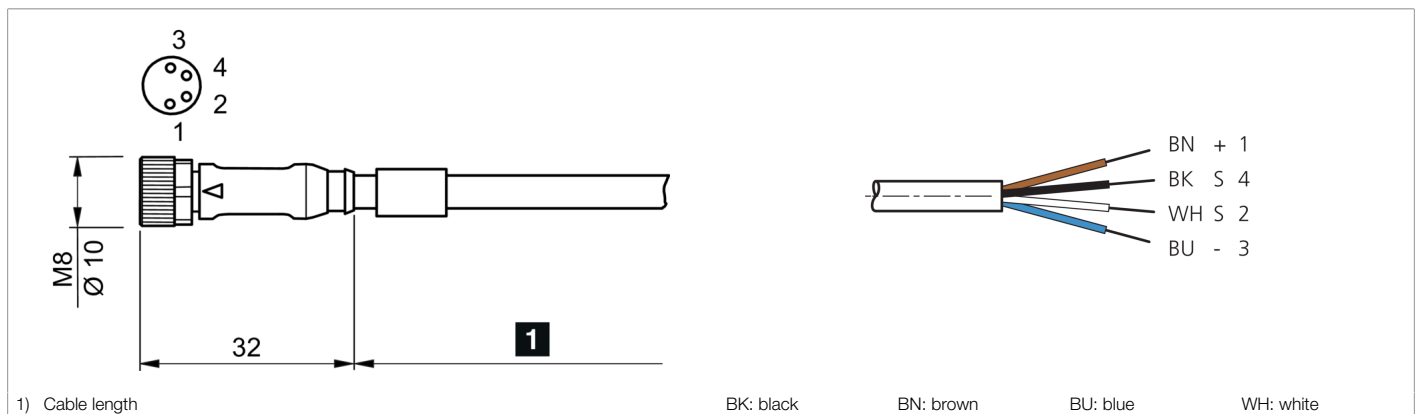

215406 AL-TZKA-4PGR-200X-FB Connection cable

- Stainless steel housing for use in the food and beverage industry
- Good chemical and oil resistance
- Sturdy PUR cable
- Resistant to high temperatures
- High protection type

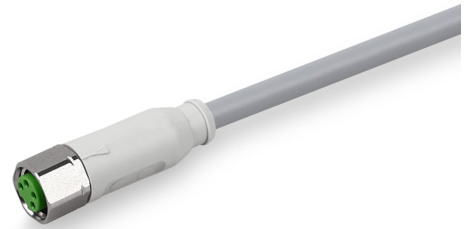

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage max. 30 V AC / max. 30 V DC (with max. 4.0 A, with max. 4.0 A)

Mechanical features

Length 2,000 mm

Diameter Ø 4.8 mm (Diameter)

Material of cable PVC, gray, unshielded

Material ■ V4A (Thread sleeve)
■ Polyurethane (Connector)

General features

Design Straight / open cable end

Ambient conditions

Ambient temperature during operation -30 ... +80 °C (Fixed)

Protection type IP 67 / IP 68 / IP 69K

Electrical connection

Connection Socket, M8, 4-pin, A-coded, 4 x 0.25 mm²

More information / accessories

<https://www.di-soric.com/215406>