






215407

AL-TWKA-4PGR-500X-FB

Connection cable

- For use in the beverage and food industry
- Good chemical and oil resistance
- Sturdy PUR cable
- Resistant to high temperatures
- High protection type

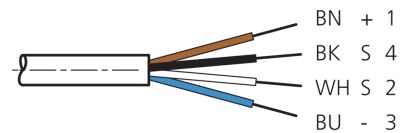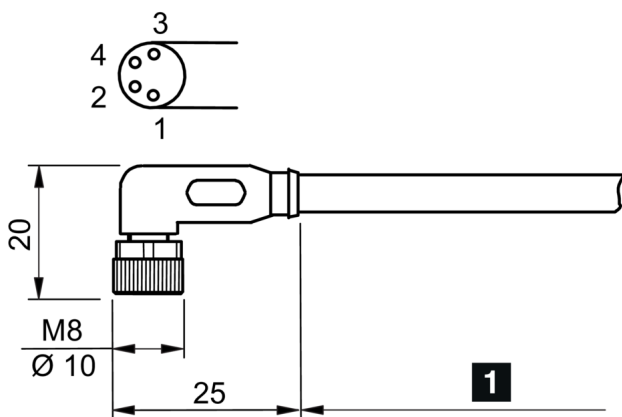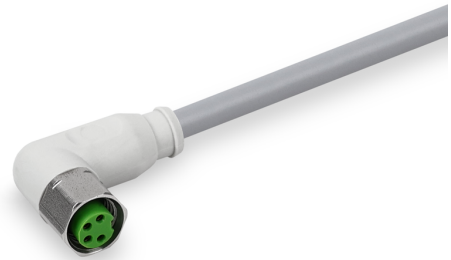

1) Cable length

BK: black

BN: brown

BU: blue

WH: white

Function



Technical data (typ.)

+20°C, 24 V DC

Electrical features

Service voltage max. 30 V AC / max. 30 V DC (with max. 4.0 A, with max. 4.0 A)

Mechanical features

Length 5,000 mm
Diameter Ø 4.8 mm (Diameter)
Material of cable PVC, gray, unshielded
Material ■ V4A (Thread sleeve)
■ Polyurethane (Connector)

General features

Design Angled / open cable end

Ambient conditions

Ambient temperature during operation -30 ... +80 °C (Fixed)
Protection type IP 66K / IP 68 / IP 69K

Electrical connection

Connection Socket, M8, 4-pin, A-coded, 4 x 0.25 mm²

More information / accessories

<https://www.di-soric.com/215407>