215566
SBT-F-GYB-R50-3S-B5
Signal column

- Status display 360°
- Good signal effect thanks to state-of-the art, efficient LEDs
- Low energy consumption
- Immediately usable, direct predefined segment activation
- Simple installation (M30 threading)
- Assembly accessories optionally available

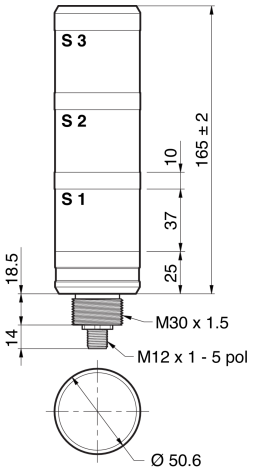



PIN	Segment / Signal	Connection cable wire color
1	Segment 3	Brown
2	Buzzer / n.c.	Whit
3	GND	Blue
4	Segment 1	Black
5	Segment 2	Grey

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	24 V DC (Supply Class 2)
Internal power consumption	105 mA (24 V DC)
Power	2.5 W (24 V)
Inverse polarity protection	Yes
Mechanical features	
Illuminated area	50 x 37 mm (Ø x H / segment)
Dimensions of luminaire unit (Ø x H)	Ø 50.6 x 165 mm
Number of segments	3
Housing material	Aluminum (natural, Anodized)
Material	Polycarbonate (Diffusor)
Weight	270 g
Certifications, approvals	
Protection class	III
Approvals	UL
General features	
Model	Signal column
Design	Column

© di-soric . Right to change reserved . 26.06.2026 . Page 1 (2)

215566
SBT-F-GYB-R50-3S-B5
Signal column

Technical data (typ.)	+20°C, 24 V DC
Functional scope	
Buzzer	Without buzzer
Color selection	Green, Yellow, Blue
Scope of delivery	Signal light incl. washer and M30 nut (pre-assembled)
Output, input, interface	
Number of inputs/outputs	3/0
Input level (high/low)	24V / 0V
Interface	24 V DC
Optical data	
Color	Green, yellow, blue
Time behavior	
LED lifespan	> 50000 h
Ambient conditions	
Vibration load	10 … 55 Hz / 0.35 mm
Ambient temperature during operation	0 … +50 °C
Protection type	IP 65
Electrical connection	
Connection	Connector, M12, 5-pin
Accessories	
Connection cable	VK … /5-SB

More information / accessories	https://www.di-soric.com/215566

© di-soric . Right to change reserved