
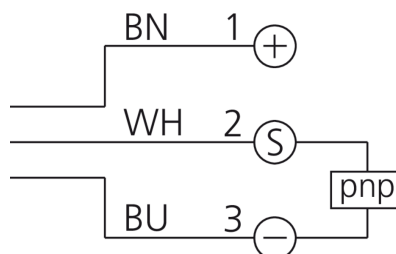


电感式接近传感器

-
- A close-up photograph of a stainless steel threaded plug. The plug has a hexagonal nut and a flat washer at the top. The plug itself has a threaded section with a small hole on the side. The bottom of the plug is smooth and cylindrical.

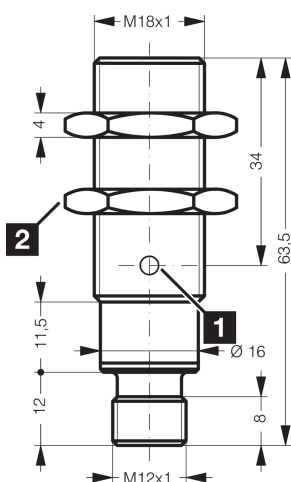

WH: 白色

+20°C, 24 V DC

© di-soric . 保留变更权 . 2026.06.27 . 侧 1 (2)



200338
DCC 18 M 12 POK-IBSL
电感式接近传感器

技术数据 (典型)		+20°C, 24 V DC
功能范围		
供货范围	传感器, 2 个螺母 M18	
输出端、输入端、接口		
开关输出端	pnp, 200 mA, NC	
电压降 (最大)	2 V (200 mA)	
探测范围、测量范围、公差极限		
感应距离 (SN)	12 mm	
标准测量板	36 x 36 x 1 mm	
开关滞后 (最大)	< 3 ... 15 %	
时间特性		
开关频率	600 Hz	
环境条件		
工作环境温度	-25 ... +70 °C	
防护等级	IP 67	
电气连接		
连接	插头, M12, 4 针, A 编码	
附件		
连接电缆	VK ...	
更多信息 / 附件		https://www.di-soric.com/200338