


电感式接近传感器

-
- A close-up photograph of a cable assembly. On the left, a black jacketed cable is shown with its outer sheath stripped back, revealing three individual insulated conductors in blue, orange, and brown. To the right, a separate component is shown: a cylindrical metal connector with a threaded body and a flared, braided shield at the top, which is designed to connect to the shielded portion of the cable.

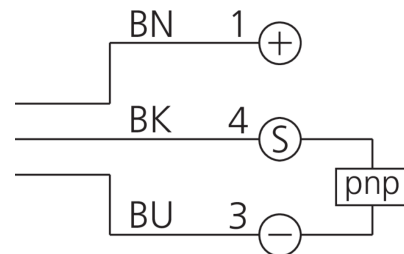

BU: 蓝色

© di-soric . 保留变更权 . 2026.06.27 . 侧 1 (2)



209299
DCB 08 MB 02 PS-3
电感式接近传感器

技术数据 (典型)		+20°C, 24 V DC
产品系列		INE 工业
功能范围		
供货范围		传感器, 2 个螺母 M8
输出端、输入端、接口		
开关输出端		pnp, 200 mA, NO
电压降 (最大)		1.8 V (200 mA)
探测范围、测量范围、公差极限		
感应距离 (SN)		2 mm
标准测量板		8 x 8 x 1 mm
开关滞后 (最大)		1 ... 20 %
显示, 操作		
LED Anzeige		是
时间特性		
开关频率		5000 Hz
环境条件		
工作环境温度		-25 ... +70 °C
防护等级		IP 67
电气连接		
连接		电缆, 2.0 m (裸端)
更多信息 / 附件		https://www.di-soric.com/209299