206652
DCCK 12 M 04B NOLK
Inductive proximity sensor

- Highly flexible cable
- Integrated amplifier
- Short-circuit protection
- Starting pulse suppression
- LED

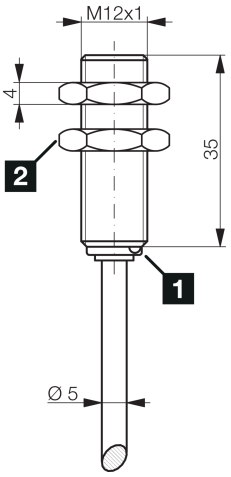

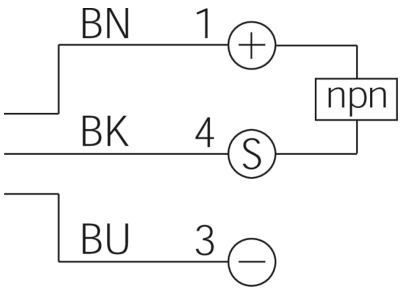

1) LED 2) Width over flats 17 mm BK: black BN: brown BU: blue

Function

Technical data (typ.)	+20°C, 24 V DC
Electrical features	
Service voltage	10 … 30 V DC
Internal power consumption	< 10 mA
Insulation voltage endurance	500 V
Mechanical features	
Installation type	Flush
Thread	M12 x 1
Housing length	35 mm
Housing material	Brass (nickel-plated)
Material of cable	PVC
Tightening torque	10 Nm
Certifications, approvals	
Protection class	III, operation on protective low voltage
General features	
Operating principle	inductive
Evaluation	digital
Design	Thread
Characteristics	increased operating distance

© di-soric . Right to change reserved

206652
DCCK 12 M 04B NOLK
Inductive proximity sensor

Technical data (typ.)	+20°C, 24 V DC
Product series	INE Industrial
Functional scope	
Scope of delivery	Sensor, 2 x M12 nuts
Output, input, interface	
Switching output	npn, 200 mA, NC
Voltage drop (max.)	2.4 V
Detection range, measuring range, tolerance limits	
Switching distance (SN)	4 mm
Standardized measuring plate	12 x 12 x 1 mm
Switching hysteresis (max.)	< 15 %
Time behavior	
Switching frequency	800 Hz
Ambient conditions	
Ambient temperature during operation	-25 … +70 °C
Protection type	IP 67
Electrical connection	
Connection	Cable, 2.0 m (flying leads)

More information / accessories	https://www.di-soric.com/206652

© di-soric . Right to change reserved